


In accordance with the Hydraulic Institute Standards, pump is guaranteed for one set of conditions. Performance guarantees are based on shop test and when handling clear, cold, fresh water at sea level and at a temperature no greater than 85 degrees F. Suction lift must not exceed that shown on curve.

Company: Patterson Pumps Company
 Name:
 6/11/2012

Patterson 60 Hz Pumps
 Catalog: Patterson Pumps 60HZ, Vers 1 2
 TwoStage_HSC - 1800

Size: 4x3 DMD-C
 Speed: 900 - 1800 rpm
 Dia: 14.875 in
 Curve: 3DMD-C
 Impeller: B-13278



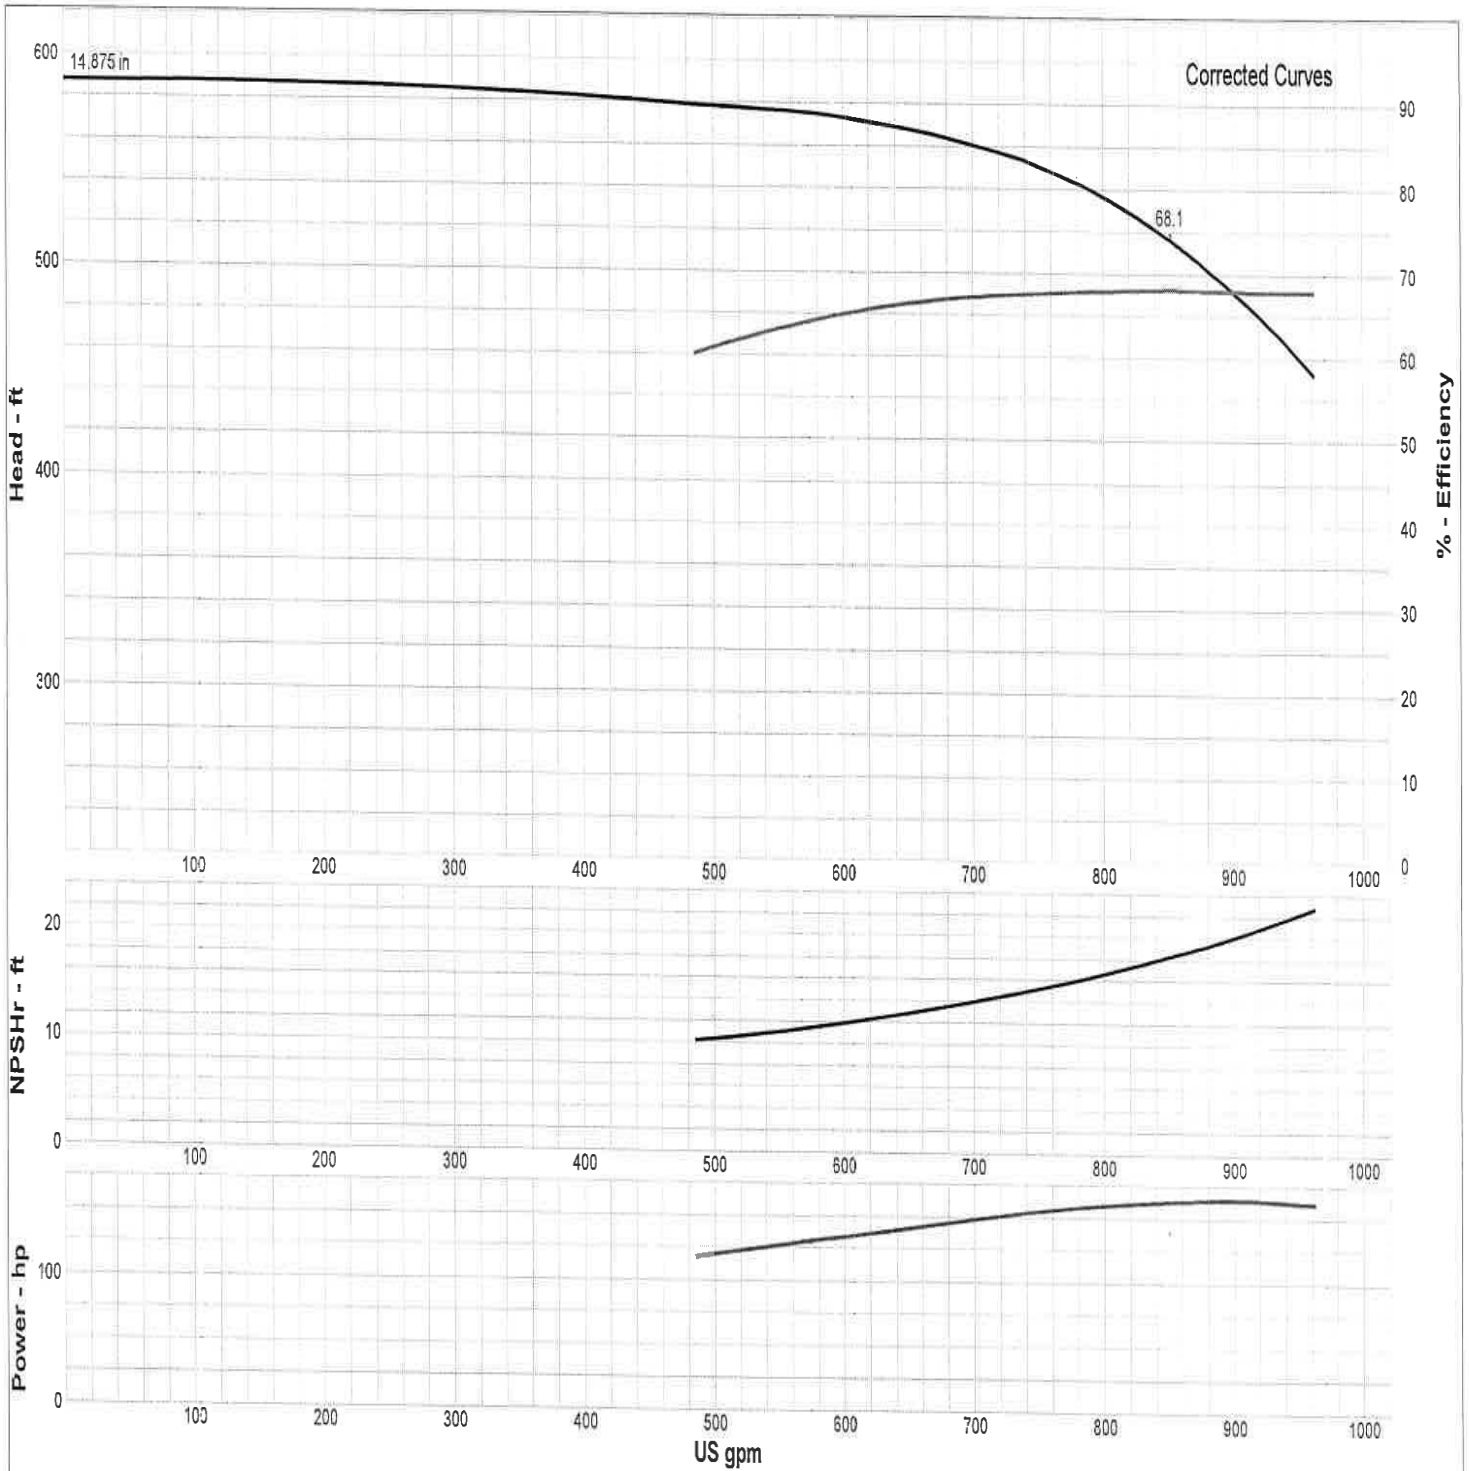

In accordance with the Hydraulic Institute Standards, pump is guaranteed for one set of conditions. Performance guarantees are based on shop test and when handling clear, cold, fresh water at sea level and at a temperature no greater than 85 degrees F. Suction lift must not exceed that shown on curve.

Company: Patterson Pumps Company
 Name:
 6/11/2012

Patterson 60 Hz Pumps
 Catalog: Patterson Pumps 60HZ, Vers 1.2
 TwoStage_HSC - 2000
 Design Point: 750 US gpm, 409 ft

Size: 4x3 DMD-C
 Speed: 2000 rpm
 Dia: 14.875 in
 Curve: 3DMD-C
 Impeller: B-13278

